


Engineer: Jack Curtis	Date: 8/18/03	<div style="text-align: center;">    <b>JPS Communications</b>   5800 Departure Drive, Raleigh, NC 27616 </div>			
Drawn: Jack Curtis	Date: 8/18/03				
Approved: CTS	Date: 8/18/03	Title: ACU RADIO APPLICATION NOTES			
Issued/ Revised	Date: 3/24/04	Size: A	Dwg. #: <b>5961-271246-APP</b>	Rev: <b>A</b>	Sheet: 1            Of    2

**APPLIES TO:**                      M/A-Com Vehicular Adapter BLM 161 67/12  
M/A-Com Vehicular Adapter BLM 161 67/32  
M/A-Com Vehicular Adapter BLM 161 67/72  
M/A-Com Vehicular Adapter BLM 161 67/172

**ADAPTER UNIT MODIFICATIONS:**    None required.

**ADAPTER UNIT PROGRAMMING:**

1.        The DIP Switches on the bottom of the unit must be set as follows:

<u>SWITCH</u>	<u>FUNCTION</u>	<u>DEFAULT</u>	<u>SET</u>	<u>COMMENT</u>
1	Ign +	Off	Off	Ign sense not used
2	A+	On	On	Ign sense not used
3	On/Off	On	On	On/Off Switch enabled
4	UDC Sense	On	On	Normal Display
5	UDC Sense	Off	Off	Normal Display
6	UDC Sense	Off	Off	Normal Display
7	Chg Rate	On	On	1.5 Amp rate
8	Radio Model	Off	On	MRK only
			Off	All other models

**RADIO CONTROLS:**

1.        Adjust the Volume Control until the yellow "SIGNAL" indicator on the associated DSP Module flashes with receive audio. Should be about in the mid-range (12 o'clock) position.

**CABLING:**

Standard ACU-1000 and ACU-T Interface cables are made up of a 2 foot TRP Radio Tray Interface cable and the appropriate 13-foot Extension cable.

ACU-1000 Interface Cable	JPS P/N 5961-291246	(5961-271246 + 5961-261002-00)
ACU-T Interface Cable	JPS P/N 5961-281246	(5961-271246 + 5961-281013-00)
TRP-1000 Shelf Interface Cable	JPS P/N 5961-271246	
Radio RF Connector Type	TNC Male	


**DSP PROGRAMMING:**

RX Level	3*	0dBm*
TX Level	6*	0dBm*
Squelch Type	VOX*	
COR Polarity	Active Low*	

High Frequency Equalizer	4*	Flat*
RX Audio Delay	2*	100 ms*
TX Audio Delay (Radio Type)	0*	No Delay*
Noise Reduction Value	0*	Off*
VOX/VMR Threshold	1*	Med1*
VOX/VMR Hang Time	3*	775 ms*
COR Inhibit After PTT	1*	100 ms*
All Others	As needed	

(\* Indicates Default Value)

**NOTES:**

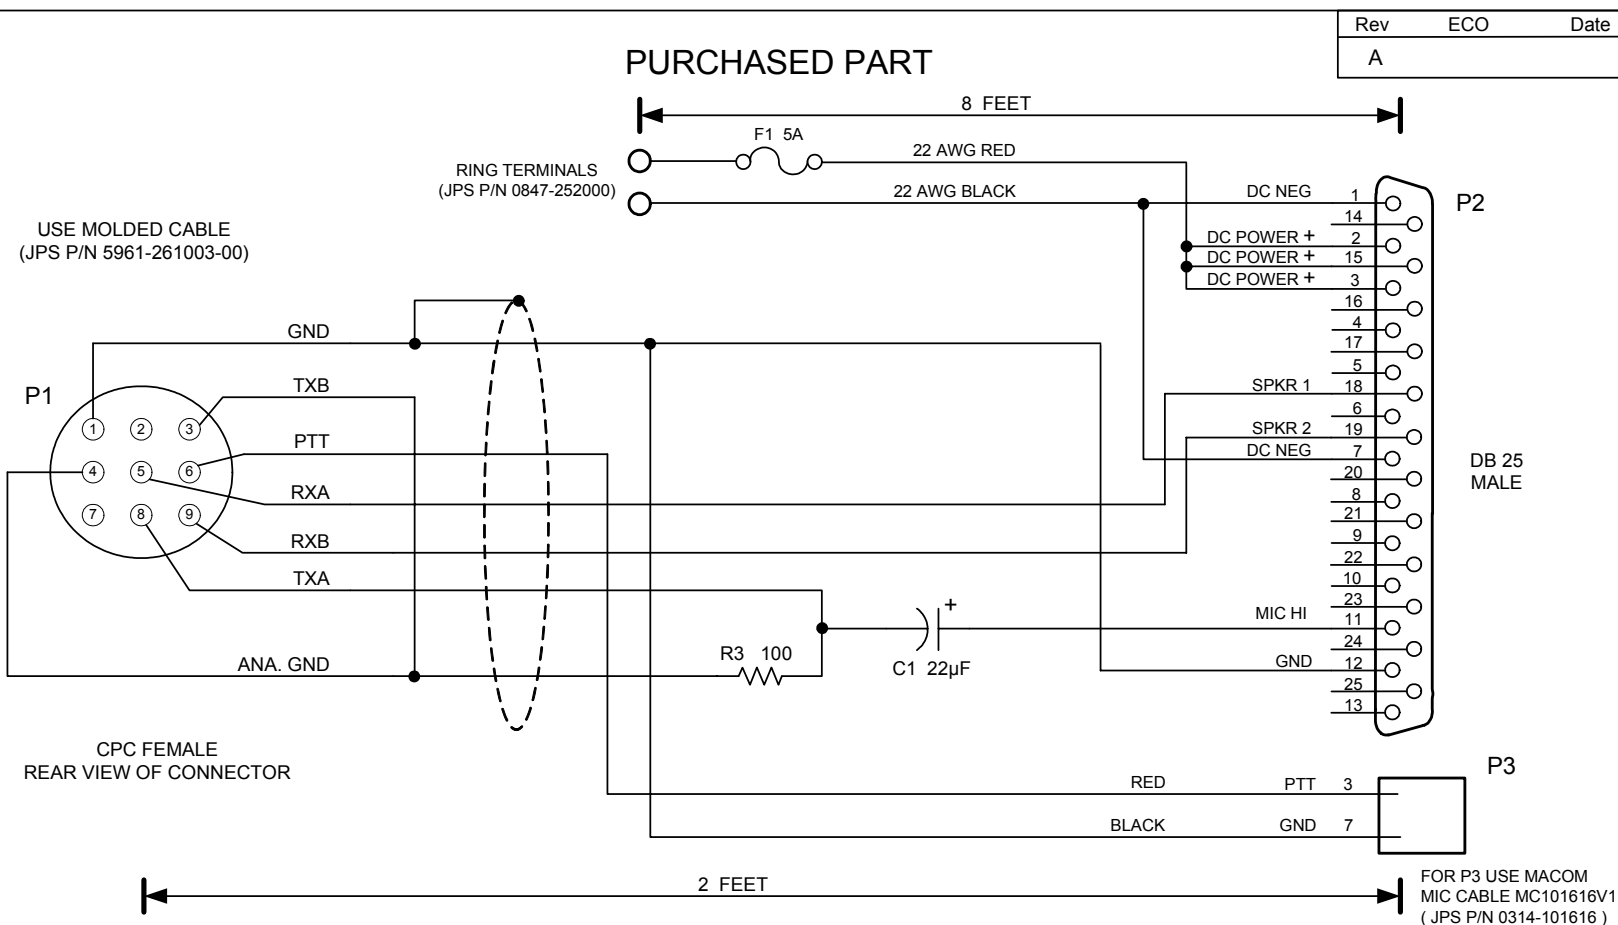


USED WITH:  
MACOM VEHICULAR ADAPTER BLM 161 67/

COMPONENT PCB (JPS P/N 5961-271000)	
C1	JPS P/N 0321-220250
R3	JPS P/N 1820-101000
JU2	
JU4	
JU5	

Designed By: JAC	<b>Raytheon JPS Communications</b> Raleigh, NC USA		
Drawn By: EDV	Title CABLE, CPC TO MACOM VEHICLE ADAPTER		
Checked By: CTS	Size A	Document Number <b>5961-271246</b>	Rev A
Issued Date		NOVEMBER 10, 2003	Sheet 1 of 1

# PURCHASED PART

Rev	ECO	Date
A		

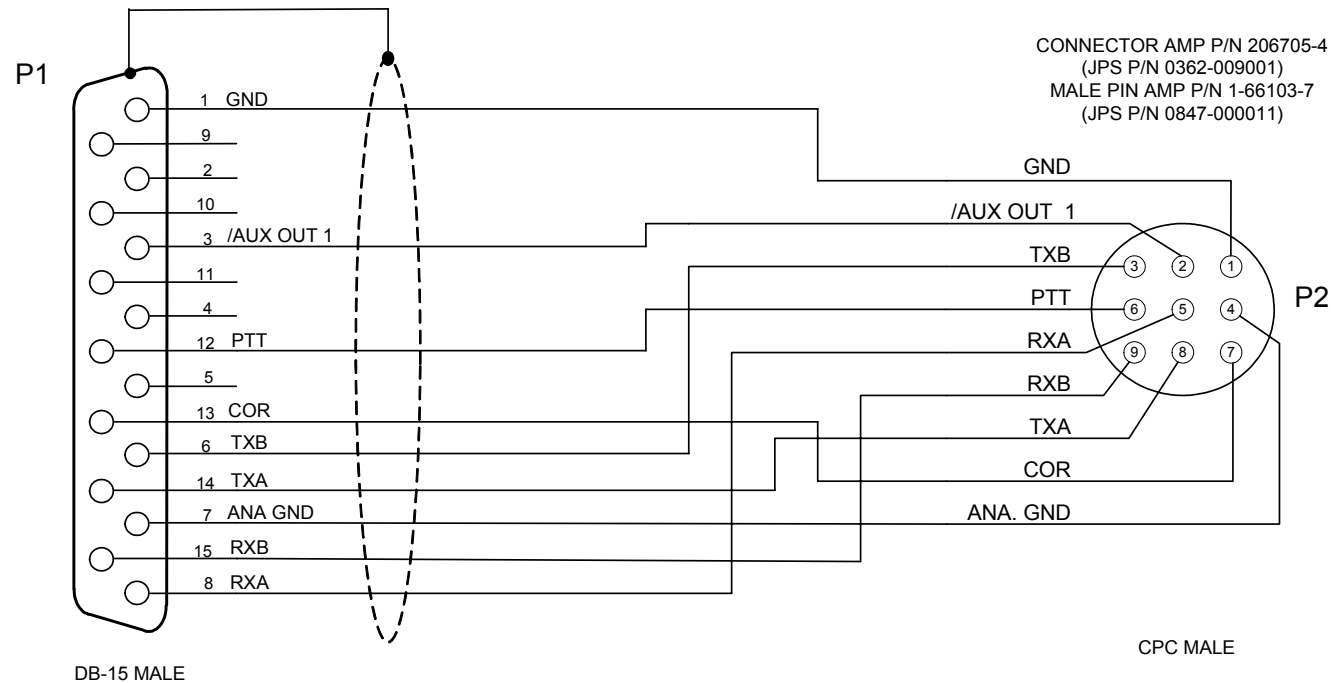

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.  
2) CONNECT SHIELD DRAIN TO SHELL OF P1 ONLY.  
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.  
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).


Designed By: JAC	<b>Raytheon JPS Communications</b>		
Drawn By: JAC	Title CABLE, ACU-1000 RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number <b>5961-261002-00</b>	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	

Rev	ECO	Date
A		

## PURCHASED PART

CONNECTOR AMP P/N 206708-1  
(JPS P/N 0362-005003)  
FEMALE PIN AMP P/N 1-66105-8  
(JPS P/N 0362-005002)

CONNECTOR AMP P/N 206705-4  
(JPS P/N 0362-009001)  
MALE PIN AMP P/N 1-66103-7  
(JPS P/N 0847-000011)

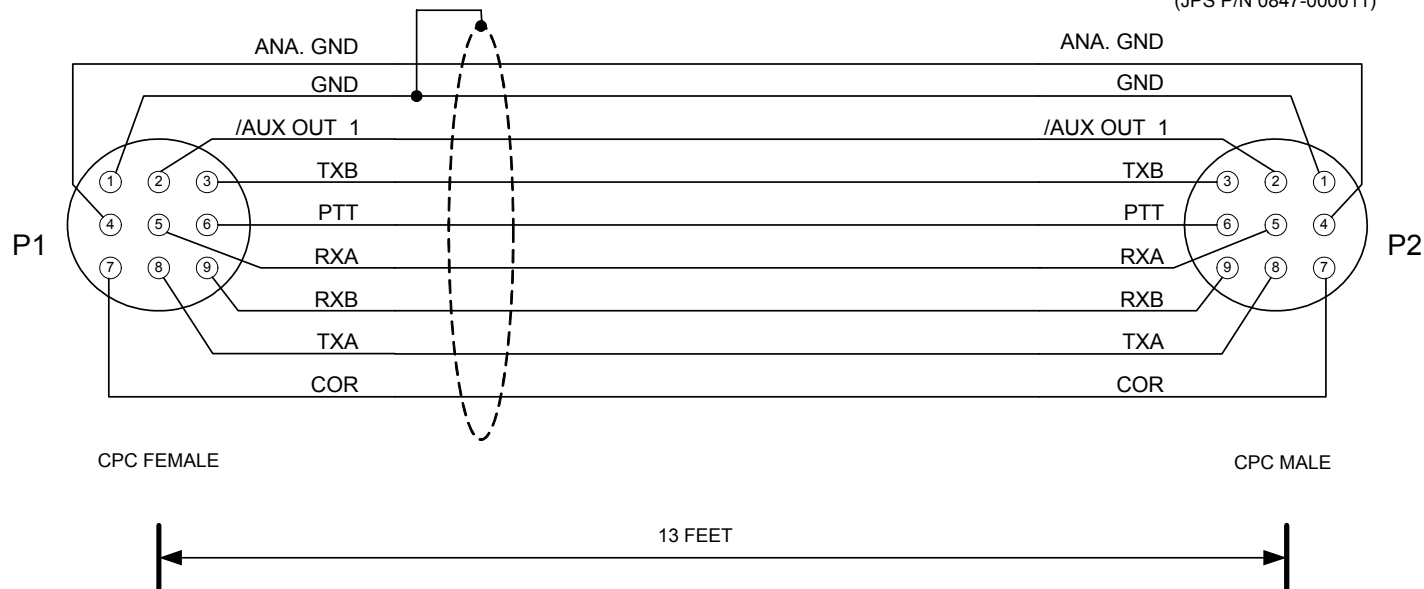

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.  
2) CONNECT SHIELD DRAIN TO PIN 1 OF P1 ONLY.  
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.  
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).

Designed By: JAC	<b>Raytheon JPS Communications</b> Raleigh, NC USA		
Drawn By: JAC	Title CABLE, ACU-T RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number <b>5961-281013-00</b>	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	